

100

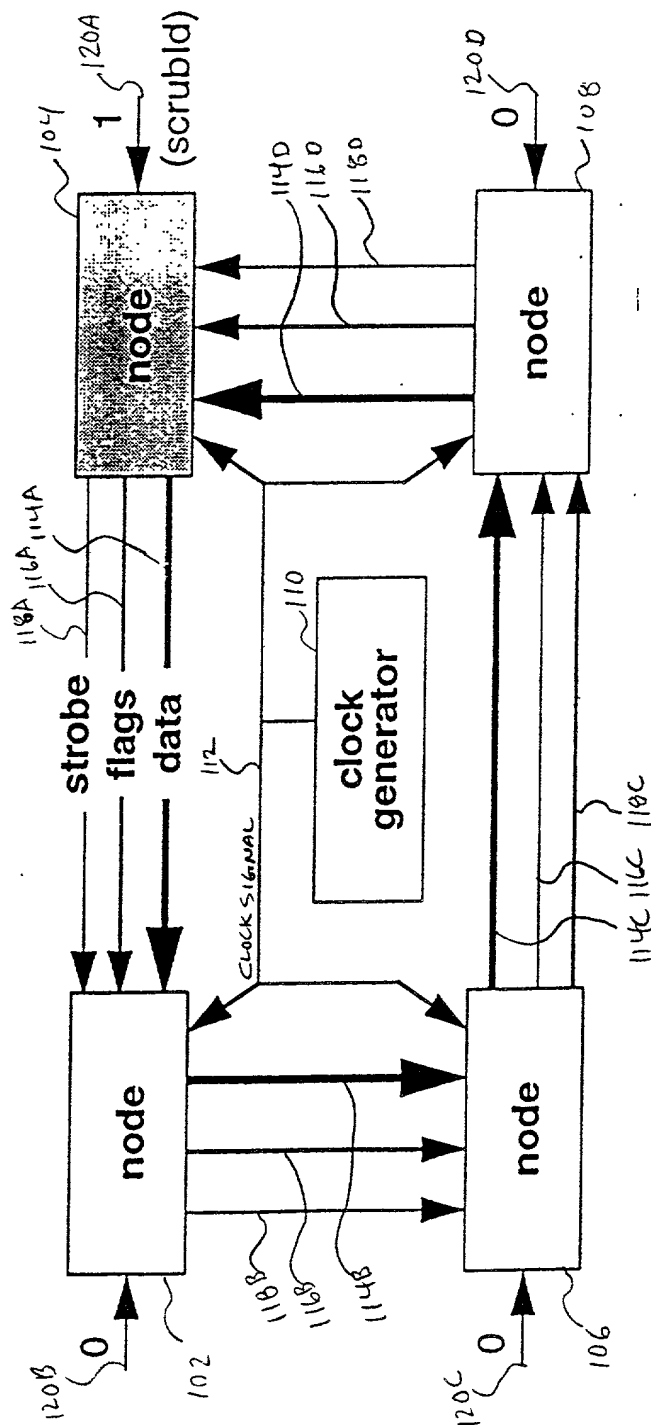


FIG. 1

200 →

pin count	SIGNAL Name	Description
1	scrubId (hardwired)	scrubber identifier (if not otherwise indicated)
1	clock (radial)	central clock/2 source
1	strobe	source-driven clock/2 indication
4	flags{0:3}	control indications
32	data{0:31}	multiplexed command&address/data

Fig. 2

300 →

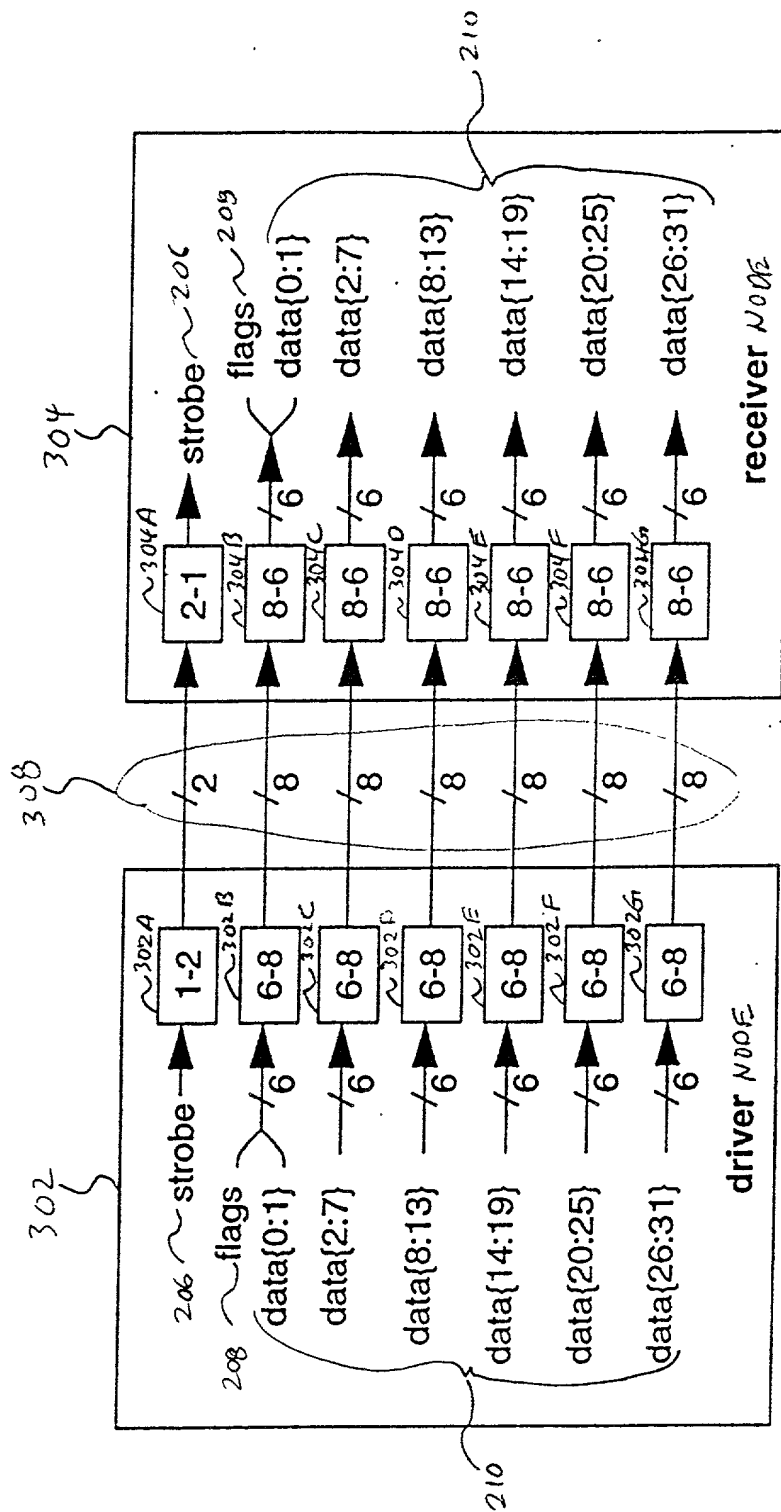


Fig. 3

400

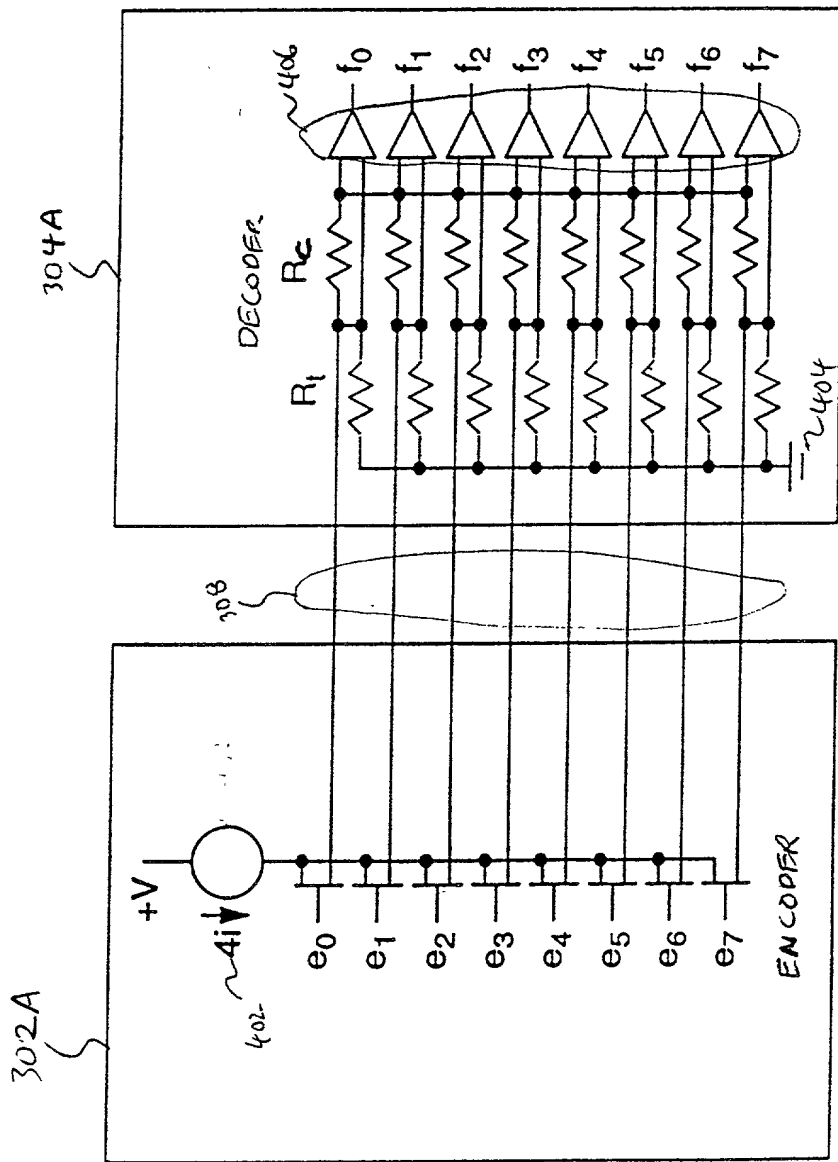


FIG. 4

FIG. 5

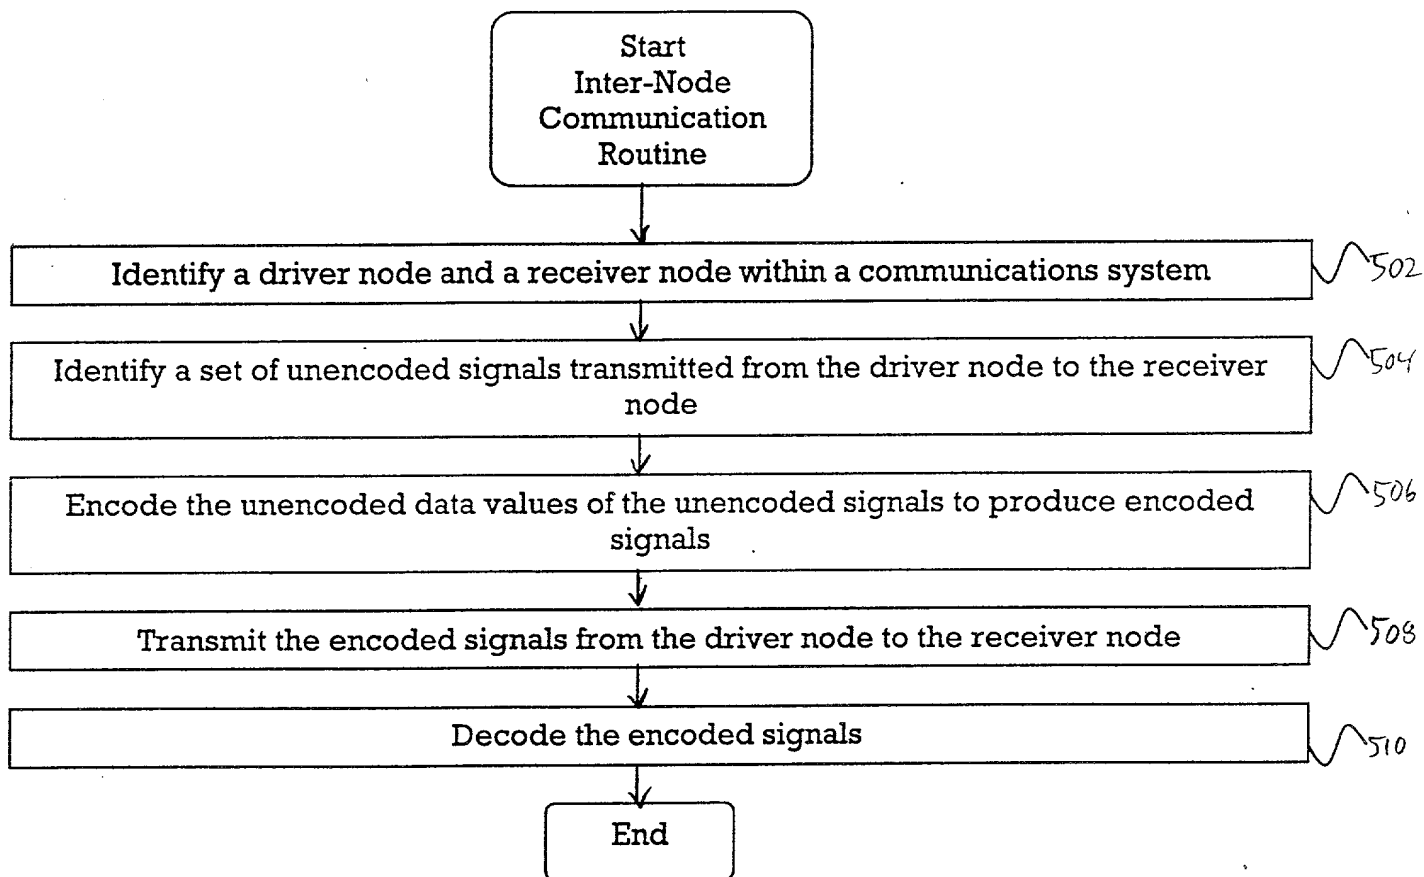


Fig. 5

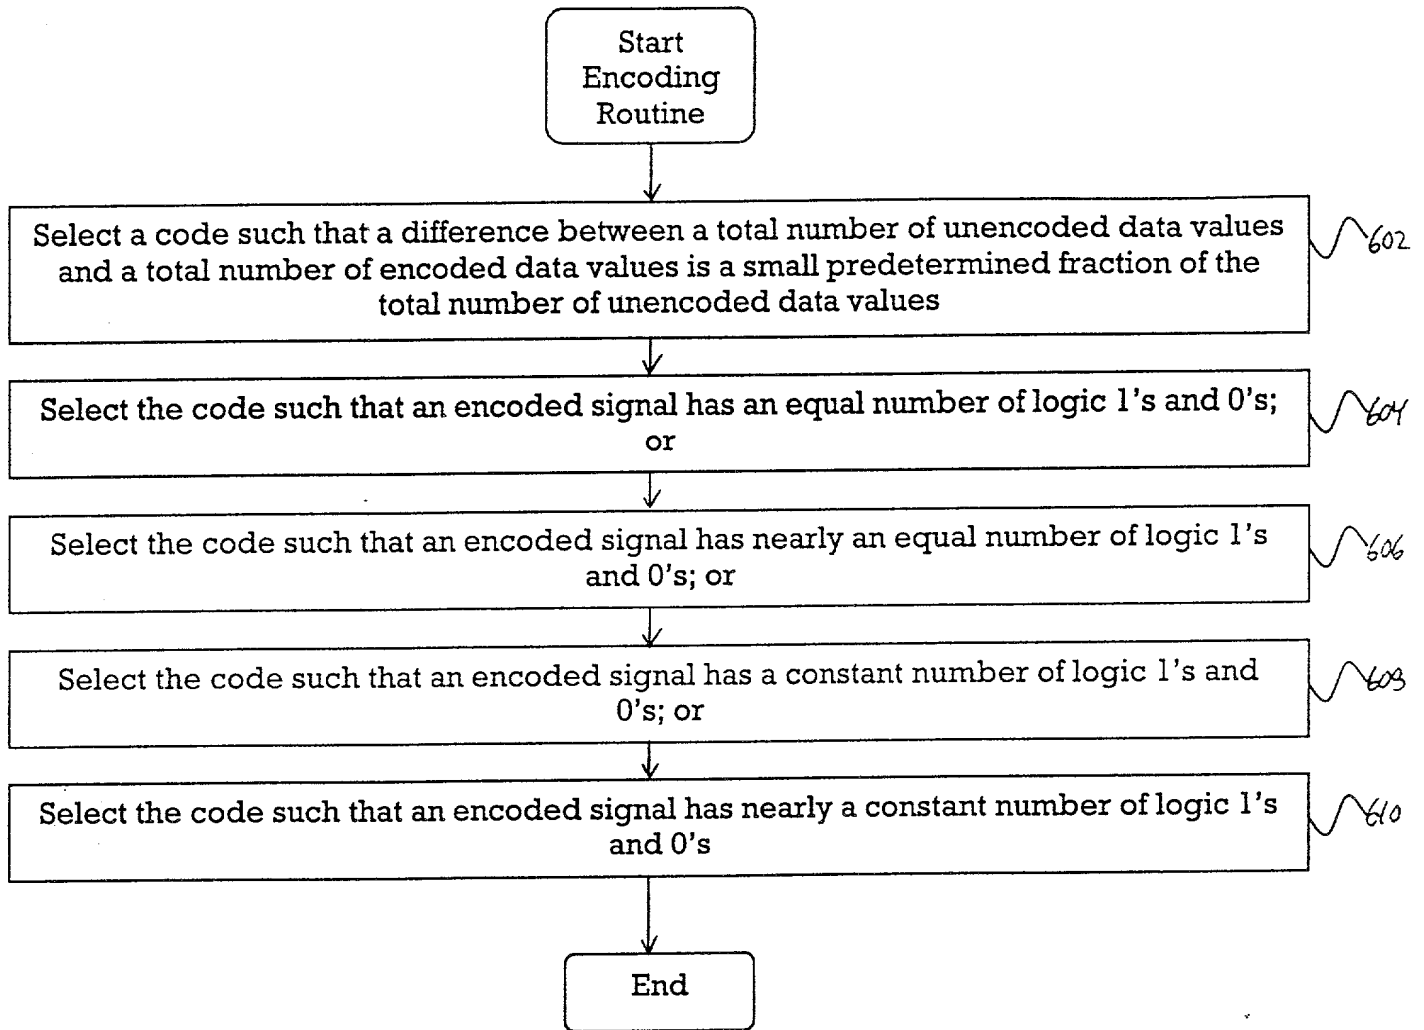


Fig. 6